


一般加工用ロングシャンク スタブ形

STUB WITH LONG SHANK FOR GENERAL APPLICATION

EX-LS-GDS

リーチの要する横形の機械や、壁、治具類に近接した部分の加工に適します。
EX-LS-GDS is best used with a horizontal machine which requires long overhang length. It performs well for drilling besides deep walls and with bush or clamping system.

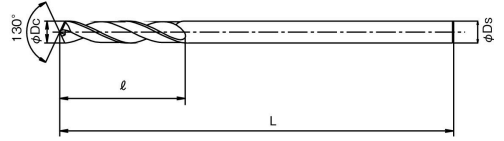

●マークの説明はP.2をご覧ください。
See page 2 for explanation of icons.

単位:mm Unit:mm

ツールNo. EDP NO.	直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	重量 Weight	標準価格 (Yen)
8601525	2.5	14	100	2.5	D	6	2,350
8602025	2.5		120			9	2,570
8602525	2.5		150			10	2,810
8601533	3.3	18	100	3.3		9	2,670
8602033	3.3		120			12	2,700
8602533	3.3		150			13	3,270
8601542	4.2	22	100	4.2		13	3,320
8602042	4.2		120			17	3,500
8602542	4.2		150			18	4,070
8601550	5	26	100	5		17	3,400
8602050	5		120			22	3,990
8602550	5		150			25	4,390
8603050	5	34	200	6.8		35	5,160
8601568	6.8		100			29	3,850
8602068	6.8		120			36	5,080
8602568	6.8	200	150	7	43	6,370	
8603068	6.8		200		62	7,760	
8603568	6.8		250		85	8,960	
8602070	7	120	7	37	4,490		
8602570	7			150	47	6,370	
8603070	7			200	64	7,760	
8603570	7	250	81	8,960			

ツールNo. EDP NO.	直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	在庫 Stock	重量 Weight	標準価格 (Yen)
8602085	8.5	37	120	8.5	D	52	7,000
8602585	8.5		150			67	9,210
8603085	8.5		200			91	10,400
8603585	8.5	41	250	8.8		116	11,500
8602088	8.8		120			59	7,600
8602588	8.8		150			72	9,140
8603088	8.8	43	200	10.3		97	11,400
8603588	8.8		250			122	12,900
8602103	10.3		120			78	8,000
8602603	10.3	47	150	10.5		96	10,400
8603103	10.3		200			139	14,300
8603603	10.3		250			174	16,100
8602105	10.5	47	120	10.8		81	8,000
8602605	10.5		150			100	10,400
8603105	10.5		200			135	14,300
8603605	10.5	47	250	10.8	179	16,100	
8602108	10.8		120		84	9,340	
8602608	10.8		150		104	12,100	
8603108	10.8	47	200	150	15,600		
8603608	10.8		250	186	17,400		

1. 切削油剤はP.870をご参照下さい。

1. Cutting fluid : Please refer to P.870.

低炭素鋼	中炭素鋼	高炭素鋼	合金鋼	調質鋼	焼入鋼			ステンレス鋼	工具鋼	鋳鉄	ダクタイル鋳鉄	銅合金	アルミ展伸材	アルミ合金鋳物	チタン合金	インコネル®	マグネシウム合金	金属基複合材料(MMC)
Low Carbon Steel	Medium Carbon Steel	High Carbon Steel	Alloy Steel	Hardened Steel	Quenched and Tempered Steel			Stainless Steel	Tool Steel	Cast Iron	Ductile Cast Iron	Copper Alloy	Aluminum	Aluminum Alloy Casting	Titanium Alloy	Inconel®	Magnesium Alloy	Metal Matrix Composites
C~0.25%	C0.25~0.45%	C0.45%~	SCM	~ 35 HRC	35~45 HRC	45~50 HRC	50~62 HRC	62~70 HRC	SUS	SKD SKS	FC	FCD	Cu	AL	AC		AZ91D	
○	○	○	○	○					○	○	○			○			○	

A, B, C, D=標準在庫品 A, B, C, D=Standard stock item.
=特定代理店在庫品 =Stocked by specific distributors. Contact us for price & availability.

SPECIFICATION CHART
形状寸法表
DRILLS
EX-GOLD DRILLS
EX-GOLD DRILLS