


T-Max® P cutting unit for turning

Rigid clamp design

Coromant Capto® - Internal coolant supply

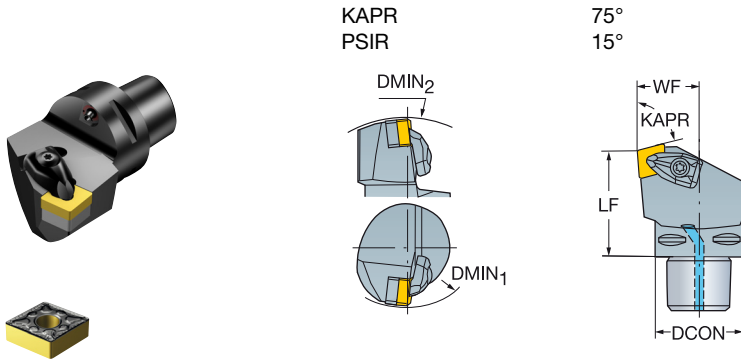

- CNMM, CNGP
- CNMG
- CNMA, CNGA

							Dimensions, mm, inch														
							Ordering code					DCON	LF	WF	HF	LPR	CP Bar/PSI			MIID	
	12	1/2	C4	110.0	50.0	1	C4-DCKNR/L-27050-12	40	50.0	27.0	0.0	53.1	10	3.9	0.49	145	1.012	3.9	0.85	CNMG 12 04 08	
				4.331	1.969	1.575		1.969	1.063	.000	2.090	145	1.012	CNMG 432							
		C5	110.0	60.0	1	C5-DCKNR/L-35060-12	50	60.0	35.0	0.0	63.1	10	3.9	0.85	145	1.859	3.9	1.31	2.882	CNMG 12 04 08	
			4.331	2.362	1.969		2.362	1.378	.000	2.484	145	1.859	CNMG 432								
		C6	110.0	65.0	1	C6-DCKNR/L-45065-12	63	65.0	45.0	0.0	68.1	10	3.9	1.31	145	2.882	6.4	0.85	1.859	2.882	CNMG 12 04 08
			4.331	2.559	2.480		2.559	1.772	.000	2.681	145	2.882	CNMG 432								
16	5/8	C5	125.0	60.0	1	C5-DCKNR/L-35060-16	50	60.0	35.0	0.0	63.8	10	6.4	0.85	145	1.859	6.4	1.31	2.882	CNMG 16 06 12	
			4.921	2.362	1.969		2.362	1.378	.000	2.512	145	1.859	CNMG 543								
	C6	125.0	65.0	1	C6-DCKNR/L-45065-16	63	65.0	45.0	0.0	68.8	10	6.4	1.31	145	2.882	6.4	1.31	2.882	CNMG 16 06 12		
		4.921	2.559	2.480		2.559	1.772	.000	2.709	145	2.882	CNMG 543									
	C6	125.0	65.0	1	C6-DCKNR/L-45065-19	63	65.0	45.0	0.0	74.6	10	6.4	1.31	145	2.891	6.4	2.37	5.214	CNMG 19 06 12		
		3.189	2.559	2.480		2.559	1.772	.000	2.938	145	2.891	CNMG 643									
C8	100.0	80.0	1	C8-DCKNR/L-55080-19	80	80.0	55.0	0.0	89.6	10	6.4	2.37	145	5.214	6.4	2.37	5.214	CNMG 19 06 12			
	3.937	3.150	3.150		3.150	2.165	.000	3.529	145	5.214	CNMG 643										

DMIN1 valid in combination with clamping unit R/LC2090.

N = Neutral, R = Right hand, L = Left hand

