



GTM **GTMS** Male Screw

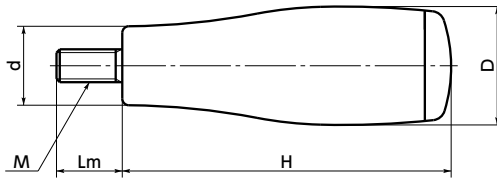

GTF **GTFS** Female Screw

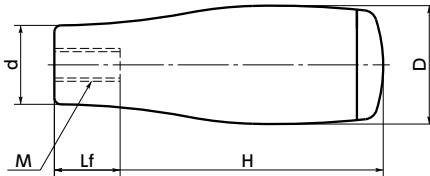

- The thread parts made of steel and stainless steel are standardized.
- The grip and screw are integrally-molded by insert. This enhances the thread part durability.
- Screw type (male / female) and thread part material can be selected by a product code. **◀1**

- GTM** — Male screw / made of steel
- GTMS** — Male screw / made of stainless steel
- GTF** — Female screw / made of steel
- GTFS** — Female screw / made of stainless steel

• Material/Finish

RoHS Compliant

	GTM Male Screw	GTMS Male Screw	GTF Female Screw	GTFS Female Screw
Grip Part	Nylon 6 (Black)	Nylon 6 (Black)	Nylon 6 (Black)	Nylon 6 (Black)
Thread Part	SS400 Ferrosferic Oxide Film (Black)	SUS303	S45C Trivalent Chromate Treatment	SUS303

GTM **GTMS** Male Screw

Unit : mm

Part Number Steel	Part Number Stainless steel	D ◀2	M ◀3	Lm	d	H	Mass (g)
GTM-18-M5	GTMS-18-M5	18	M5	10	12	50	16
GTM-19-M6	GTMS-19-M6	19	M6	13	13	65	22
GTM-24-M8	GTMS-24-M8	24	M8	15	17	80	39
GTM-28-M10	GTMS-28-M10	28	M10	18	20	95	68
GTM-28-M12	GTMS-28-M12	28	M12	20	20	95	89

GTF **GTFS** Female Screw

Unit : mm

Part Number Steel	Part Number Stainless steel	D ◀2	M ◀3	Lf	d	H	Mass (g)
GTF-18-M5	GTFS-18-M5	18	M5	10	12	50	13
GTF-19-M6	GTFS-19-M6	19	M6	12	13	65	19
GTF-24-M8	GTFS-24-M8	24	M8	16	17	80	30
GTF-24-M10	GTFS-24-M10	24	M10	20	17	80	43
GTF-28-M10	GTFS-28-M10	28	M10	20	20	95	58
GTF-28-M12	GTFS-28-M12	28	M12	24	20	95	66

• Part number specification



Cleanroom Wash & Packaging → P.792	Vibration Resistant → P.795	Laser Marking → P.806	Modification of Shaft Hole Diameter → P.800
Not Available	Male screw only/ Add'l charge	Available / Add'l charge	Not Available