

Liquidtight cable gland **CAPCON**

OA-W SERIES

Powerful clamping force keeps out water and dust!



Point **1** IP67 protectivity Point **2** Versatile usage Point **3** Wide variations

Wide range

24 models


Offers great flexibility to different cable sizes!



Applications: For protection and strain relief of cables in control panels and other electrical wiring devices

Model	Applicable cable dia. (mm)	Entry hole dia. (mm)	Threads	Max. plate thickness	Working temperature	Weight	Q'ty per package
OA-WW16-04/12	φ 4-12	φ 21	CTG16 (G 1/2)	4mm	-25 to +80°C	15g	20 pcs.
OA-WW16-08/15	φ 8-15					17g	
OA-WW22-11/20	φ 11-20	φ 28	CTG22 (G 3/4)	6mm		34g	10 pcs.
OA-WW20M-04/12	φ 4-12	φ 21	M20 x 1.5	8mm		13g	20 pcs.
OA-WW20M-08/15	φ 8-15					15g	
OA-WW25M-11/19	φ 11-19	φ 26	M25 x 1.5	10mm		31g	10 pcs.

Identification of model

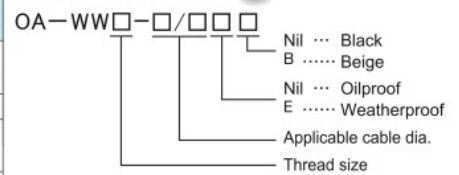

*Above models are black,oilproof type. For other colors and weatherproof type, see the "identification of model".

Standard

96 models




Versatile lineup offers freedom of choice

Applications: For protection and strain relief of cables in control panels and other electrical wiring devices

Model	Applicable cable dia. (mm)	Entry hole dia. (mm)	Threads	Max. plate thickness	Working temperature	Weight	Q'ty per package	
OA-W15M-04	φ 2-4	φ 15	M15x1.0	3mm	-25 to +80°C	8g	20 pcs.	
OA-W15M-05	φ 3-5					7g		
OA-W15M-07	φ 5-7					7g		
OA-W1606	φ 4-6	φ 21	CTG16 (G 1/2)	4mm		13g		10 pcs.
OA-W1608	φ 6-8					12g		
OA-W1609	φ 7-9					13g		
OA-W1611	φ 9-11				12g			
OA-W1613	φ 11-13				12g			
OA-W1614	φ 13-14	φ 28	CTG22 (G 3/4)	6mm	11g	10 pcs.		
OA-W2213	φ 9-13				35g			
OA-W2216	φ 13-16				32g			
OA-W2219	φ 15-19	φ 34	CTG28 (G1)	5.5mm	30g	5 pcs.		
OA-W2820	φ 13-20*1				71g			
OA-W2823	φ 19-23	φ 42	CTG36 (G1 1/4)	7.5mm	67g	5 pcs.		
OA-W3626	φ 21-26				111g			
OA-W3630	φ 25-30				107g			

Identification of model

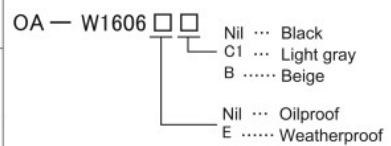

*Above models are black,oilproof type. For other colors and weatherproof type, see the "identification of model".

Multiple

54 models




Up to 4 cables can be clamped at once

Applications: For clamping and protecting sensor wires or other multiple number of cables

Model	Applicable cable dia. (mm)	No. of cavity	Entry hole dia. (mm)	Threads	Max. plate thickness	Working temperature	Weight	Q'ty per package	
OA-W15M-302	φ 2.4-3.0	2	φ 15	M15P=1	3mm	-25 to +80°C	7g	20 pcs.	
OA-W16-224	φ 1.7-2.2	4					13g		
OA-W16-334	φ 2.2-3.3	4					14g		
OA-W16-402	φ 3-4	2	φ 21	CTG16 (G 1/2)	4mm		14g		10 pcs.
OA-W16-404		4					15g		
OA-W16-503	φ 4-5	3	φ 28	CTG22 (G 3/4)	6mm		14g		10 pcs.
OA-W16-602	φ 5-6	2				36g			
OA-W22-604		4	35g						
OA-W22-704	φ 6-7								

Identification of model

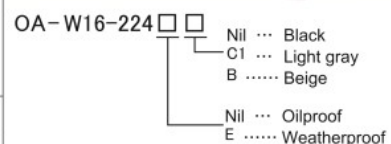

*Above models are black,oilproof type. For other colors and weatherproof type, see the "identification of model".