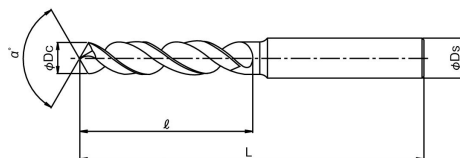


ネクサスドリル スタブ形

NEXUS DRILL STUB

NEXUS-GDS

フォーフェイスポイント
Four Face point

info



P.318

●マークの説明はP.2をご覧ください。
See page 2 for explanation of icons.

単位:mm Unit:mm

ツールNo. EDP NO.	直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	先端角 α°	在庫 Stock	重量 Weight	標準価格 (Yen)
8650100	1	6	38	3	140	A	4	873
8650110	1.1	7	39				4	1,020
8650120	1.2	8	40				4	1,020
8650130	1.3						4	1,020
8650140	1.4	9	41				4	1,020
8650150	1.5						4	864
8650160	1.6	10	42				4	936
8650170	1.7						4	1,020
8650180	1.8	11	43		4		1,020	
8650181	1.81				4		1,180	
8650183	1.83				4		1,180	
8650190	1.9				4		1,020	
8650200	2	12	44		4		856	
8650210	2.1				4		992	
8650211	2.11	13	45		4		1,180	
8650213	2.13				4		1,180	
8650220	2.2	14	46	4	992			
8650228	2.28			4	1,180			
8650230	2.3	15	47	4	992			
8650238	2.38			4	1,180			
8650240	2.4	16	48	4	992			
8650250	2.5			4	856			
8650260	2.6	17	49	4	953			
8650270	2.7			4	953			
8650276	2.76			4	1,150			
8650278	2.78			4	1,150			
8650280	2.8	18	50	4	953			
8650290	2.9			4	953			
8650300	3	19	51	4	794			
8650310	3.1			5	992			
8650320	3.2	20	52	5	992			
8650325	3.25			6	1,050			
8650330	3.3	21	53	5	992			
8650340	3.4			6	992			
8650350	3.5	22	54	6	992			
8650360	3.6			6	1,190			
8650365	3.65	23	55	6	1,260			
8650367	3.67			6	1,370			
8650370	3.7	24	56	6	1,190			
8650380	3.8			6	1,090			
8650390	3.9	25	57	6	1,190			
8650400	4			6	1,090			
8650410	4.1	26	58	12	1,430			
8650420	4.2			12	1,300			
8650430	4.3	27	59	13	1,430			
8650440	4.4			15	1,430			
8650450	4.5	28	60	15	1,300			
8650459	4.59			15	1,920			
8650460	4.6	29	61	13	1,670			
8650463	4.63			13	1,920			
8650470	4.7	30	62	13	1,670			
8650480	4.8			13	1,670			
8650490	4.9	31	63	15	1,670			

1. 切削油剤はP.870をご参照下さい。

WDIコーティングにより、外周マージン摩耗を抑制し、高速領域での長寿命を実現した、ステンレス鋼、軟鋼、アルミニウム合金、銅合金などに最適なドリルです。

The WDI Coating inhibits wear on the margin to achieve long tool life in high-speed machining. Providing outstanding performance in stainless steels, aluminum alloys and copper alloys.

ツールNo. EDP NO.	直径 Dc	溝長 ℓ	全長 L	シャンク径 Ds	先端角 α°	在庫 Stock	重量 Weight	標準価格 (Yen)						
8650500	5	26	70	6			14	1,510						
8650510	5.1						14	1,510						
8650520	5.2						14	1,750						
8650530	5.3						14	1,930						
8650540	5.4						16	1,930						
8650548	5.48	16	2,240											
8650550	5.5	14	1,750											
8650560	5.6	14	2,240											
8650570	5.7	28	72				16	2,240						
8650580	5.8						15	2,240						
8650590	5.9						15	2,240						
8650600	6						15	1,980						
8650610	6.1			22	2,520									
8650620	6.2	31	75	8	120	A	22	2,520						
8650630	6.3						22	2,520						
8650640	6.4						24	2,520						
8650650	6.5						24	2,270						
8650660	6.6						23	2,270						
8650680	6.8	34	78				23	2,570						
8650690	6.9						23	2,570						
8650700	7						23	2,410						
8650734	7.34						25	3,050						
8650738	7.38						25	3,050						
8650740	7.4	37	81				10	120	A	25	2,650			
8650750	7.5									26	2,650			
8650780	7.8			26	2,940									
8650790	7.9			26	2,940									
8650800	8			26	2,750									
8650810	8.1	40	90	12	120	A				45	3,240			
8650820	8.2									45	3,240			
8650830	8.3									45	3,240			
8650840	8.4									46	3,240			
8650850	8.5									46	2,940			
8650860	8.6	43	93							46	2,940			
8650870	8.7									47	3,630			
8650880	8.8						47	3,630						
8650900	9						48	3,050						
8650918	9.18						48	4,660						
8650920	9.2	47	104				12	120	A	49	4,060			
8650924	9.24									49	4,660			
8650934	9.34			49	4,660									
8650936	9.36			49	4,660									
8650950	9.5			49	3,720									
8650980	9.8	51	108	12	120	A				50	4,550			
8651000	10									51	3,860			
8651020	10.2									70	5,110			
8651030	10.3									71	5,110			
8651040	10.4									71	5,110			
8651050	10.5	47	104							12	120	A	72	4,680
8651100	11												74	4,840
8651120	11.2						75	6,250						
8651150	11.5						76	5,730						
8651200	12						80	5,800						

1. Cutting fluid : Please refer to P.870.

A、B、C、D=標準在庫品 A、B、C、D=Standard stock item.

□=特定代理店在庫品 □=Stocked by specific distributors. Contact us for price & availability.