RXE4100 RXH4100 (Duplex, Stationary Internal Pipe: Flange Connection)

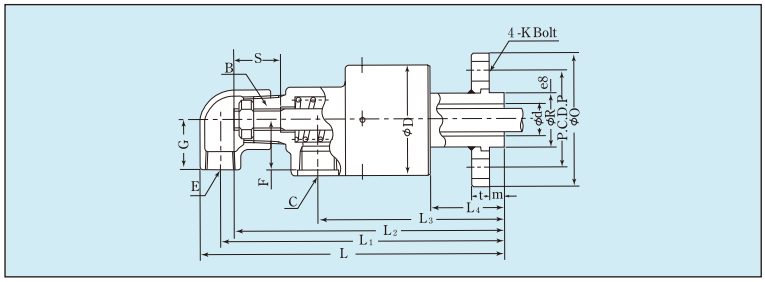

NOMINAL SIZE	CODE	B	C	E	d	FLANGE DIMENSIONS						F	G	D	L	L1	L2	L3	L4	INTERNAL PIPE
						R	O	P	m	t	K									S
15A	4115	G1/8	Rc1/2	Rc3/8	12.5	25	62	45	8	10	M8	24	25	53	163	151	143	101	38	22
20A	4120	G1/4	Rc1/2	Rc3/8	18	30	74	54	8	12	M10	29	28	65	177	166	157	111	45	23
25A	4125	G3/8	Rc3/4	Rc1/2	22	35	80	60	9	12	M10	33	33	72	198	185	174	121	48	26
32A	4132	G1/2	Rc1	Rc3/4	30	50	96	75	9	14	M10	36	40	83	224	207	194	137	50	30
40A	4140	G3/4	Rc1	Rc3/4	35	50	96	75	9	14	M10	39	43	89	229	212	199	140	50	32
50A	4150	G1	Rc1 1/2	Rc1	48	65	120	95	10	14	M12	50	51	115	272	251	237	168	60	34
65A	4165	G1 1/4	Rc2	Rc1 1/2	58	80	136	110	12	16	M12	68	62	123	330	300	278	191	60	45
80A	4180	G1 1/2	Rc2	Rc1 1/2	68	90	154	125	15	20	M12	72	62	138	343	313	290	202	65	45

* The flange connection type is supplied with a copper gasket (to be attached on the shaft end) , along with a stud bolt, nut and washer set.
* When you place an order for the flange connection type, it is not necessary to specify the direction of the thread.
* The internal pipe retaining nut (lock nut) is supplied with the joint.
* Please prepare the internal pipe by yourself. If you should place an order for the internal pipe with us, please be sure to specify the dimensions.

RXE3300 RXH3300 (Duplex, Stationary Internal Pipe: ISO Metric Thread With Pilot)

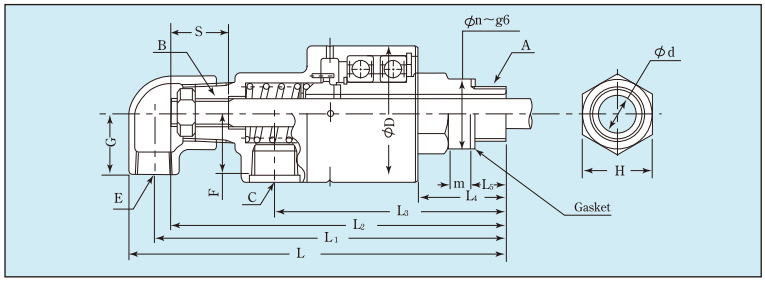

NOMINAL SIZE	CODE	A: SIZE OF ROTOR THREAD	B	C	E	F	G	D	L	L1	L2	L3	L4	L5	m	n	d	H	INTERNAL PIPE
																			S
15A	3315	M22×1.5	G1/8	Rc1/2	Rc3/8	24	25	53	162	150	142	100	37	14	10	28	12.5	30	22
20A	3320	M25×1.5	G1/4	Rc1/2	Rc3/8	29	28	65	173	162	153	107	41	16	10	30	16	32	23
25A	3325	M33×1.5	G3/8	Rc3/4	Rc1/2	33	33	72	196	183	172	119	46	18	10	40	22	41	26

* A rotor with a parallel screw is supplied with the copper plate gasket.
* The internal pipe retaining nut (lock nut) is supplied with the joint.
* Please prepare the internal pipe by yourself. If you should place an order for the internal pipe with us, please be sure to specify the dimensions.

RXC & RXM are the same as RXE & RXH respectively but Casing and Elbow (connection for hose) threads are NPT.
RXC: Suitable for cooling service. Lubrication free due to pre-greased ball bearings
RXM: Available for high temperature operation with high grade seal materials and providing grease nipple for lubrication