


Model LMK

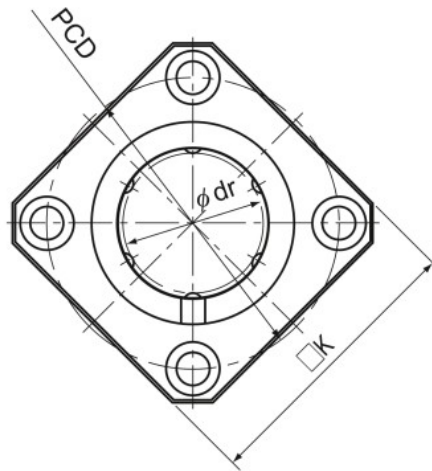

Model LMK

Model No.	Ball rows	Main dimensions							
		Inscribed bore diameter		Outer diameter		Length		Flange diameter	
		dr	Tolerance	D	Tolerance	L	Tolerance	D ₁	Tolerance
LMK 6	4	6	0 -0.009	12	0 -0.011	19	0 -0.2	28	0 -0.2
LMK 8S	4	8		15		17		32	
LMK 8	4	8		15		24		32	
LMK 10	4	10		19	29	39			
LMK 12	4	12	21	0 -0.013	30	42			
LMK 13	4	13	23	32	43				
LMK 16	5	16	28	37	48				
LMK 20	5	20	0 -0.010	32	0 -0.016	42	54		
LMK 25	6	25		40		59	62		
LMK 30	6	30		45	64	74			
LMK 35	6	35	0 -0.012	52	0 -0.019	70	82		
LMK 40	6	40		60		80	96		
LMK 50	6	50		80	100	116			
LMK 60	6	60	0 -0.015	90	0 -0.022	110	134	0 -0.3	

Note) Since this model contains a synthetic resin retainer, do not use it at temperature exceeding 80°C.
If requiring a type equipped with a seal, indicate it when placing an order.

(Example) LMK13 UU

└── Seal attached on both ends of the nut