


GR TYPE




There are some non-conforming products.



Fixed wheel Plate type



GR-65N

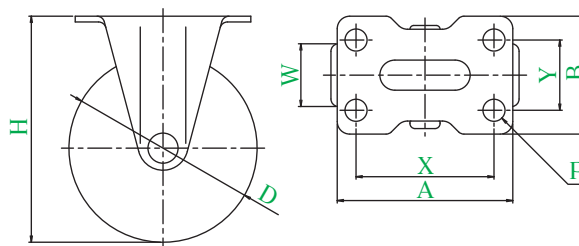

● Description of product number
GR - 75 UR
Bracket type Wheel diameter Wheel type

Notice of revision of specifications: For casters that will be shipped after April 2012, surface treatment will be changed from chrome plating to trivalent unichrome coating. Bracket = Trivalent unichrome coating

| Product number | Wheels | | | | | | | | |
|----------------|--------|-------------------------|----------------------|--------------------------|----------------------------|----------------------------------|------------------------|----------------------------|---------------------|
| | | Wheel diameter D(mm) | Wheel width W(mm) | Mounting height H(mm) | Mounting base A × B(mm) | Mounting dimensions X × Y(mm) | Hole diameter P(mm) | Allowance load daN(kgf) | Wheel weight (g) |
| GR-25 | R | 25 | 12 | 35 | 36 × 18 | 29 × 0 | 4.2 | 8(8.2) | 25 |
| | N | | | | | | | 10(10.2) | 25 |
| | UR | | | | | | | 10(10.2) | 25 |
| GR-32 | R | 32 | 14 | 42 | 36 × 20 | 29 × 0 | 4.2 | 12(12.2) | 35 |
| | N | | | | | | | 18(18.4) | 35 |
| | UR | | | | | | | 18(18.4) | 35 |
| GR-38 | R | 38 | 17 | 50 | 46 × 25 | 36 × 15 | 5.3 | 20(20.4) | 55 |
| | N | | 16 | | | | | 28(28.6) | 50 |
| | UR | | | | | | | 28(28.6) | 55 |
| GR-50 | R | 50 | 20 | 65 | 58 × 40 | 45 × 25 | 6.5 | 30(30.6) | 125 |
| | N | | 21 | | | | | 38(38.8) | 95 |
| | UR | | | | | | | 38(38.8) | 105 |
| | EL | | 20 | | | | | 25(25.5) | 100 |
| GR-65 | RH | 65 | 25 | 80 | 70 × 47 | 55 × 28 | 8.8 | 40(40.8) | 225 |
| | N | | | | | | | 55(56.1) | 165 |
| | UR | | | | | | | 55(56.1) | 185 |
| | EL | | 27 | | | | | 40(40.8) | |
| GR-75 | RH | 75 | 25 | 90 | 70 × 47 | 55 × 28 | 8.8 | 50(51.0) | 275 |
| | N | | | | | | | 65(66.3) | 185 |
| | UR | | 26 | | | | | 65(66.3) | 210 |
| | EL | | 27 | | | | | 50(51.0) | 210 |

- Conductive rubber wheel having wheel diameter of ϕ 50 and ϕ 75 can be manufactured.
- For nylon wheels having a wheel diameter of ϕ 50 to ϕ 75, black wheels can be manufactured.
- For casters having a wheel diameter of ϕ 50 to ϕ 75, chrome plating finish is available.

Wheel in use

Refer to P156 for detailed specifications.



R RH
Rubber wheel



N
Nylon wheel



UR
Urethane wheel with nylon wheel assembly



EL
Elastomer wheel

J

PM

J2

RJ2

SJ

S

E

G

L

SA

H

CAL
-H

M

PL

Silence

SUS
-J2

SUS
-SJ

SUS
-S

SUS
-E

SUS
-H

P

SKY

Equipped
with
adjuster
foot

Special

Easy
lock

Wheels