

SFP

Oiles 500SP₁ SL1 Flat Plates

Selection Guide

Product Information

Plastic Bearing

Multi-layer Bearing

Metallic Bearing

Air Bearings

Slide Shifter

Technical Information

Corporate Profile




Specify Part No. by required width and length.

(e.g.) Width is 28mm and length is 150mm.

SFP - 28150




Part No.

Motion direction


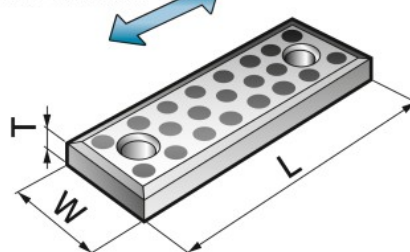


● Motion direction: length direction

■ Example of combination use with SLP.



W=18, 28, 38, 48

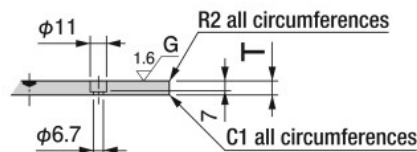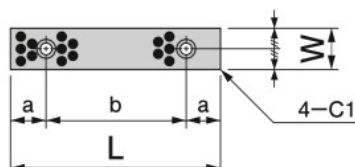

Cross-section

Part No.	Width	Length	Thickness		Hole intervals		Attach bolts	
	W	L	T	Tolerance	a	b	Type	Qty
SFP-1875	18	75	10	+0.04 +0.01	15	45	M6 Hexagon socket head	2
SFP-18100	18	100	10	+0.04 +0.01	25	50	M6 Hexagon socket head	2
SFP-18125	18	125	10	+0.04 +0.01	25	75	M6 Hexagon socket head	2
SFP-18150	18	150	10	+0.04 +0.01	25	100	M6 Hexagon socket head	2
SFP-2875	28	75	10	+0.04 +0.01	15	45	M6 Hexagon socket head	2
SFP-28100	28	100	10	+0.04 +0.01	25	50	M6 Hexagon socket head	2
SFP-28125	28	125	10	+0.04 +0.01	25	75	M6 Hexagon socket head	2
SFP-28150	28	150	10	+0.04 +0.01	25	100	M6 Hexagon socket head	2
SFP-3875	38	75	10	+0.04 +0.01	15	45	M6 Hexagon socket head	2
SFP-38100	38	100	10	+0.04 +0.01	25	50	M6 Hexagon socket head	2
SFP-38125	38	125	10	+0.04 +0.01	25	75	M6 Hexagon socket head	2
SFP-38150	38	150	10	+0.04 +0.01	25	100	M6 Hexagon socket head	2
SFP-4875	48	75	10	+0.04 +0.01	15	45	M6 Hexagon socket head	2
SFP-48100	48	100	10	+0.04 +0.01	25	50	M6 Hexagon socket head	2
SFP-48125	48	125	10	+0.04 +0.01	25	75	M6 Hexagon socket head	2
SFP-48150	48	150	10	+0.04 +0.01	25	100	M6 Hexagon socket head	2