
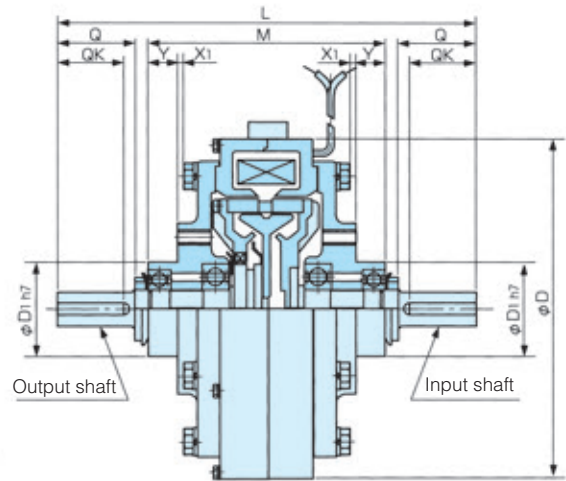




POC-0.3, 0.6A, 1.2A, 2.5A, 5A, 10, 20, 40

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at 75°C(W)	Mass(kg)
POC-0.3	3	24	13.3	2.5
POC-0.6A	6	24	19.2	3.5
POC-1.2A	12	24	20.4	5.5
POC-2.5A	25	24	26.8	10
POC-5A	50	24	47.3	16.5
POC-10	100	24	52.8	35
POC-20	200	24	66	58
POC-40	400	24	92	100

POC-0.3 POC-10~40

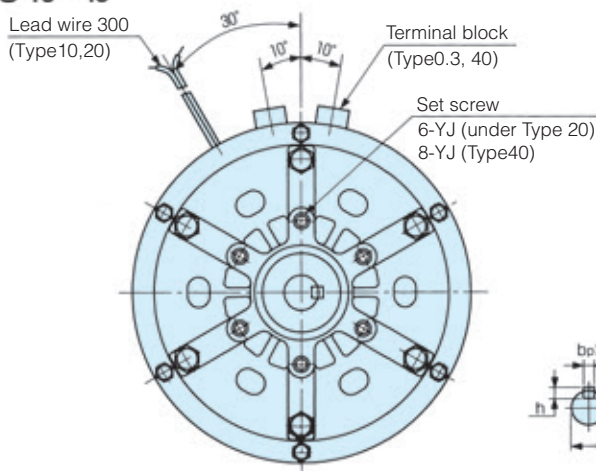

POC-0.6A~5A

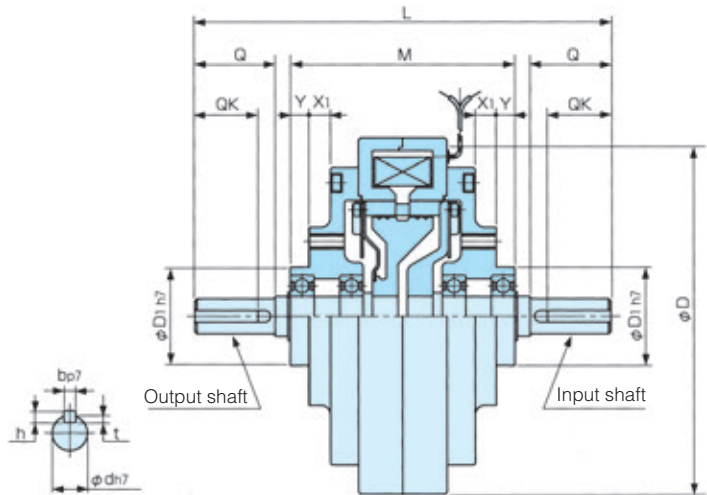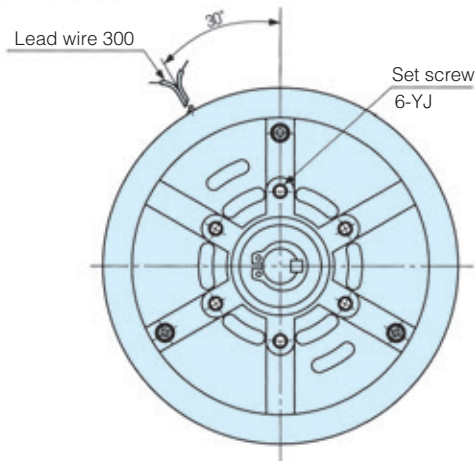

Model	Diameter direction		Shaft direction				Attachment		Shaft end					
	D	D1	L	M	X1	Y	P.C.D	Tap	Q	QK	d	b	h	t
POC-0.3	120	42	147	87	5.8	11	64	M5×10	23	20	10	4	4	2.5
POC-0.6A	134	42	151	86	7	8	64	M5×11	26	22	12	4	4	2.5
POC-1.2A	152	42	178	96	9	8	64	M6×13	34.5	27	15	5	5	3
POC-2.5A	182	55	215	111.5	9	9	78	M6×13	43	35	20	5	5	3
POC-5A	219	74	274	141	8	18	100	M6×13	57	47	25	7	7	4
POC-10	290	100	348	192	7.5	25	140	M10×18	67	56	30	7	7	4
POC-20	335	110	382	216	10.5	25	150	M10×18	71	60	35	10	8	4.5
POC-40	395	130	490	278	22.5	33	200	M12×20	92	80	45	12	8	4.5